

## E. COCKPIT CANOPY


1. Your cockpit canopy is specially designed to come apart instead of break. If it should happen to come apart during play, it is easy to snap back as shown.

(Tab on canopy snaps back into slot in plane.)

If clear windshield comes out, simply press it back into place.

## F. LANDING **STRUTS**

- 1. Pull button back on bottom of Snowspeeder.
- 2. Strut flips down for action landings.
- 3. To retract, press strut into strutwell and slide lever forward. (SEE FIG. F1)

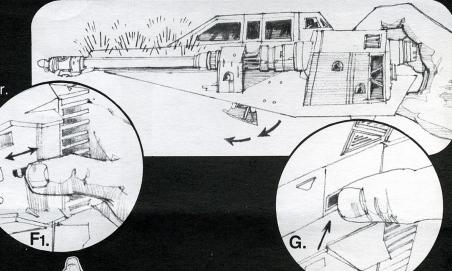



1. Push the square button on the bottom of Snowspeeder to activate laser lights and sound. See the simulated fire from the guns.

IMPORTANT: If laser lights and sounds do not work and you are using fresh batteries, they may not be installed properly.

- Re-enact exciting STAR WARS Adventures.
- Many STAR WARS Action Figures fit into the cockpit. You can make your Action Figures harpoon the enemy.

No. 071-049

WE REALLY DO CARE

We make each toy with lots of tender loving care ... so, if something seems to be wrong, please read the instructions again carefully. If any part is missing or broken when you receive your toy, we will, as a service to you, replace it free of charge.

Please identify the name of any missing part (or parts) by using the instruction sheet description. Simply fill out the form provided and send it along with the broken part to:

KENNER PRODUCTS 1014 VINE STREET CINCINNATI, OHIO 45202 Attn: Consumer Relations

KENNER PRODUCTS 1014 VINE STREET CINCINNATI, OHIO 45202

NAME

REBEL ARMORED

SNOWSPEEDER

ADDRESS

CITY

STATE


NAME OF MISSING PART(S)


PLEASE RETURN BROKEN PART(S)

\*\*TRADEMARK OWNED BY LUCASFILM, LTD. (LFL) AND USED BY KENNER UNDER AUTHORIZATION. © 1977, 1978, 1980 LUCASFILM, LTD. (LFL)






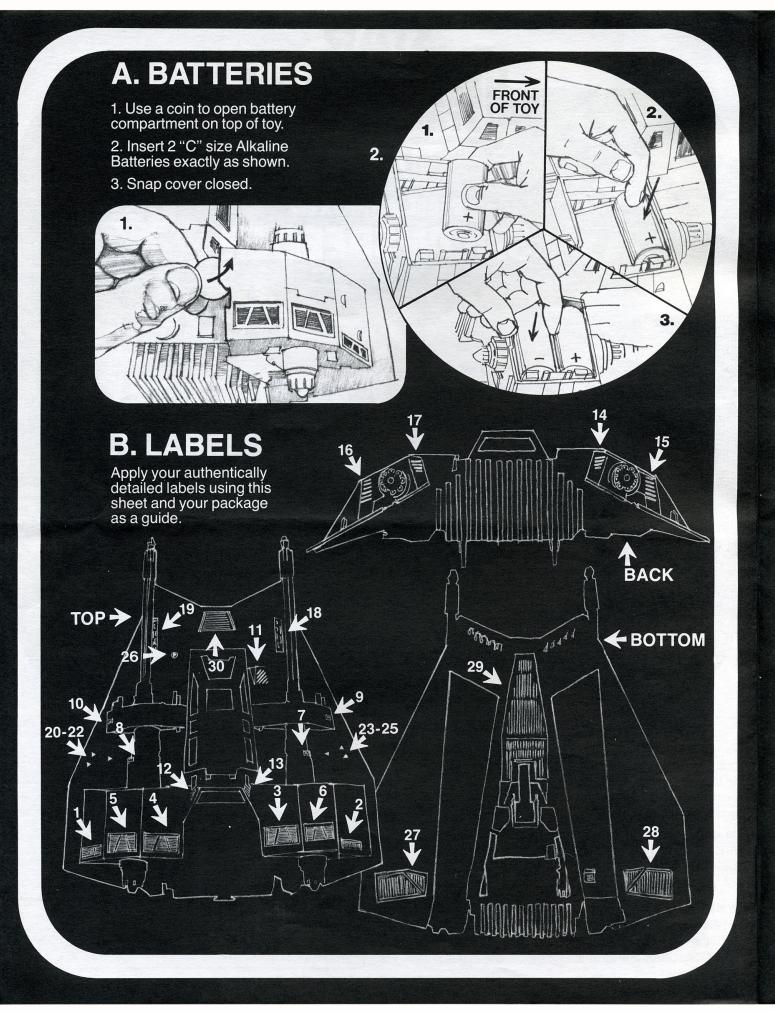

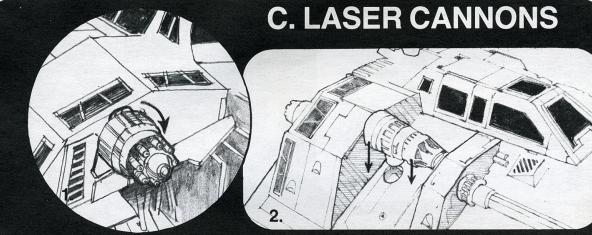


1. Insert rear Cannon into slot and rotate to lock.

2. Part B goes on left side of Snowspeeder." looking from the front. Part A on the right.




3. Insert barrel into hole with flat spot down.




4. Press down and rotate barrel until slot is up.

## D. LASER HARPOON GUN

1. Press tabs down into opening.





2. Double-knot one end of string, then thread unknotted end through hole in Harpoon Mount. (Be sure to thread from back as shown.)

3. Tie string to end of Harpoon.

4. Harpoon spool presses onto grillwork. Snap Harpoon into place on gun mount.

5. String wraps around Harpoon spool for storage.